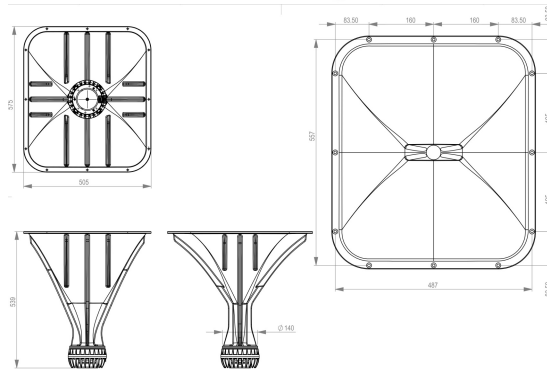






# ME464-464

**8Ω****Horn/Driver Combinations - 1.4 Inches**

- Constant Directivity horn with DCX464-8 driver
- Time coherent coaxial ring radiator design (Patents EP3644623B1, US11343608B2)
- 80x60° nominal coverage\*
- 109.4 dB sensitivity
- 220 W continuous program power capacity
- Neodymium magnet assembly
- (\*revised 20/10/20)

# ME464-464

## Horn/Driver Combinations- 1.4 Inches

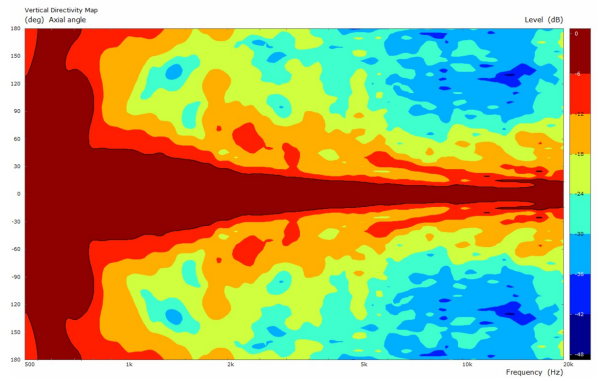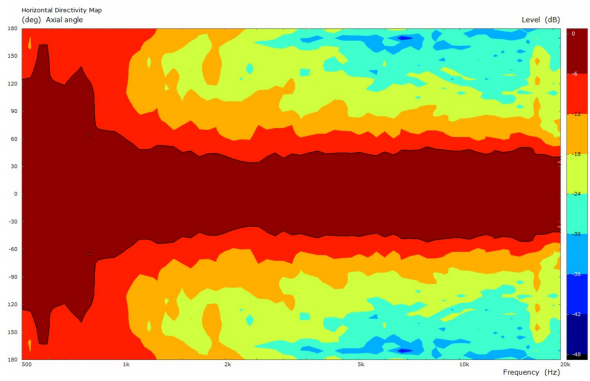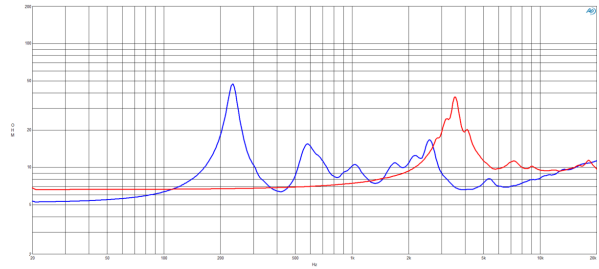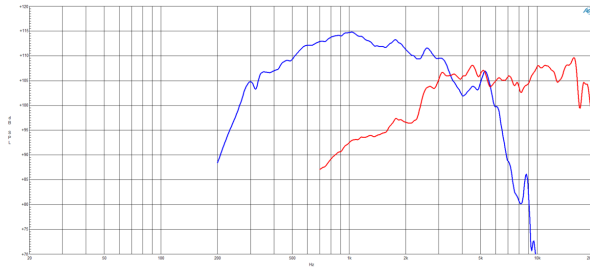

### SPECIFICATIONS

Nominal Impedance	8 Ω
Nominal Coverage Horizontal	80.0 °
Nominal Coverage Vertical	60.0 °
Cutoff Frequency	0.3 kHz
Design	Constant Directivity
Material	Polyurethane

### SPECIFICATIONS HF UNIT

Minimum Impedance	9.3 Ω
Nominal Power Handling <sup>1</sup>	80 W
Continuous Power Handling <sup>2</sup>	160 W
Sensitivity (1W/1m) <sup>3</sup>	105.8 dB
Frequency Range	3.5 - 18.0 kHz
Voice Coil Diameter	65 mm (2.56 in)
Flux Density	2.14 T
Recommended Crossover <sup>4</sup>	4.0 kHz
Inductance	0.1 mH
Winding Material	Aluminium
Diaphragm Material	HT Polymer
Magnet Material	Neodymium

### SPECIFICATIONS MF UNIT

Minimum Impedance	6.3 Ω
Nominal Power Handling <sup>5</sup>	110 W
Continuous Power Handling <sup>6</sup>	220 W
Sensitivity (1W/1m) <sup>7</sup>	109.4 dB
Frequency Range	0.3 - 5.5 kHz
Voice Coil Diameter	100 mm (4.0 in)
Flux Density	1.9 T
Recommended Crossover <sup>8</sup>	0.3 kHz
Inductance	0.21 mH
Winding Material	Aluminium
Diaphragm Material	HT Polymer
Magnet Material	Neodymium

### MOUNTING AND SHIPPING INFO

Baffle Cutout Dimension	538x470 mm (21.18x18.50 in)
Driver Diameter	152 mm (5.98 in)
Dimensions	575x505x539 mm (22.64x19.88x21.22 in)
Net Weight	8.5 kg (18.74 lb)

1. AES Standard
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. 12 dB/oct. Or higher slope high-pass filter.
5. AES Standard
6. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
7. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
8. 12 dB/oct. Or higher slope high-pass filter.

### B&C Speakers s.p.a.

Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) - ITALY - Tel. +39 055 65721 - Fax +39 055 6572312 - mail@bcspeakers.com